


High-end server
based on AMD EPYC™ 4th Gen CPU
with 12x 3.5" + 2x 2.5" Drives.



No contractual

Isometric view

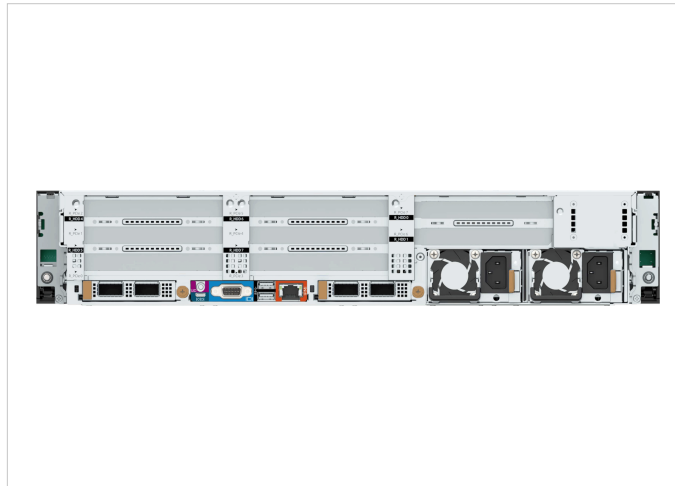

No contractual

Front view

Key Features



19-inch - 2U
12x 3.5" SATA/SAS/NVMe



Dual AMD EPYC™ 4th Gen socket



24x DDR5 @ 4800MHz



6x PCIe 5.0 x16 FH 3/4L
2x PCIe 5.0 x16 HHHL
2x OCP 3.0 x16



Air Cooling

4th Gen AMD EPYC™ Processors

Introducing the AMD EPYC™ 9004 Series Processors family – a **powerful and versatile platform** designed to deliver exceptional performance, scalability, and security for the most demanding workloads.

With up to **128 high-performance cores** and 256 threads, these processors are built to handle the most intensive data center workloads, from enterprise applications to HPC and AI workloads.

The **energy efficiency** of the EPYC platform also allows you to reduce your carbon footprint and significantly improve your total cost of ownership.

Cloud and Enterprise Made Flexible

The latest 4th Gen AMD EPYC™ processors are built upon years of expertise for your HPC, Cloud or AI needs. "Zen 4" enables bandwidth and memory capacity, as well as latest-generation I/O featuring PCIe® 5.0 and memory expansion with CXL™.

Mona servers designed for modularity

Our Mona servers are designed and built for **diversity in applications**. With up to **12 drives 3.5" on front** and **24 DDR5 channels**, VDI, Hypervisor or Cloud workloads can be successfully handled.


In need of expansions? GPU? Additional network? RAID card? Mona servers can **manage up to 10 PCI extensions 5.0**, including 2 OCP 3.0.



SCAN THE CODE!

TO DISCOVER MORE
ABOUT THIS PRODUCT

SPECIFICATIONS

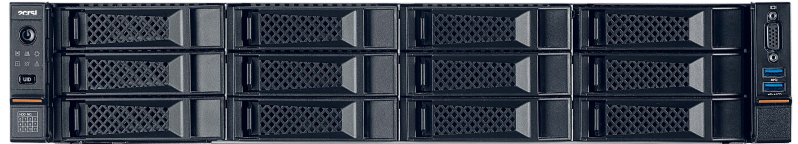

System	Model	BRB-MA1-214GG-R010
	Form factor	2U
	Dimension	482mm (W) x 850mm (D) x 87mm (H) - 19" (W) x 33.4" (D) x 3.4" (H)
	Cooling Technology	Air Cooling
Storage	External type	12x 3.5" (SATA/SAS*/NVMe) on front *SAS : Depends on SAS Add-on card
	RAID Controller	RAID : 1 mezz RAID card or PCH
Motherboard	CPU	2x Socket SP5 (LGA 6096) AMD EPYC™ 9004 processors Single or Dual processor, CPU TDP up to 400W
	Expansion slots	6x PCIe FH 3/4L Gen5 2x PCIe FHH Gen5 2x OCP 3.0 Gen5
	BMC	Integrated Aspeed® AST2600
	TPM	TPM 2.0 included
Memory	Total slots	24 (12-channel per CPU)
	Capacity	Maximum up to 3TB per Node
	Memory type	DDR5 4800 RDIMM up to 128GB
Network		1x 1GbE Management Port dedicated to the IPMI
I/O	Front	1x VGA 1x Healthy LED, UID 1x Power button with LED
	Rear	1x VGA 1x RJ45 for MGMT 1x BMC/System Serial Port 2x USB 3.0 1x UART 1x UID/BMC RST Button and LED
Management Solution	Software	ASPEED AST2600
	Out of band remote management	WebGUI, Intelligent Platform Management Interface (IPMI)
Power Supply	Type	1+1 Redundant CRPS
	Power rating	1300W
	Power Efficiency	80 PLUS Titanium (96%)
Operating Environment	Operating Temperature	10°C to 35°C
	Non-operating Temperature	Storage (packed): -40°C to +70°C
	Operating Relative Humidity	8% to 90% RH
	Non-operating Relative Humidity:	5% to 95% RH
Warranty	2CRSi hardware warranty includes a one year, parts and labour with return to 2CRSi selling entity. Customers may purchase an extended warranty of up to 3 years on parts and labour with different support levels. Please contact 2CRSi at support@2crsi.com or reach your sales point of contact for complete warranty details including limitations and transferability. 2crsi.com/global-location	

Mona 1.14GG

SKU based on options

This product is available with different options.

This table provides valuable information about the features and capabilities associated with each SKU (stock keeping unit), enabling potential customers and internal stakeholders to make informed decisions. Each SKU has been carefully classified according to the options available, providing a clear picture of the functionality associated with each variant.

SKU	Storage support	Spec
BRB-MA1-214GG-R010	12x 3.5' NVMe/SATA/SAS	12x 3.5' NVMe/SATA/SAS* *SAS controller required
BRB-MA1-214GG-R011	12x 3.5' NVMe/SATA/SAS	12x 3.5' NVMe/SATA/SAS on RAID with SlimSAS 8i
BRB-MA1-214GG-R012	12x 3.5' NVMe/SATA/SAS	12x 3.5' NVMe/SATA/SAS on RAID with MiniSAS-HD

BRB-MA1-214GG-R0XX Diagram

