


OctoRack 42SL

Rack with optimized Air Cooling

Key features

- 42OU Rack for OTOpus range
- 2 zones of 48 servers 10U
- Up to 36kW
- Triple 12V DC Busbar
- Fan Tray system

Overview

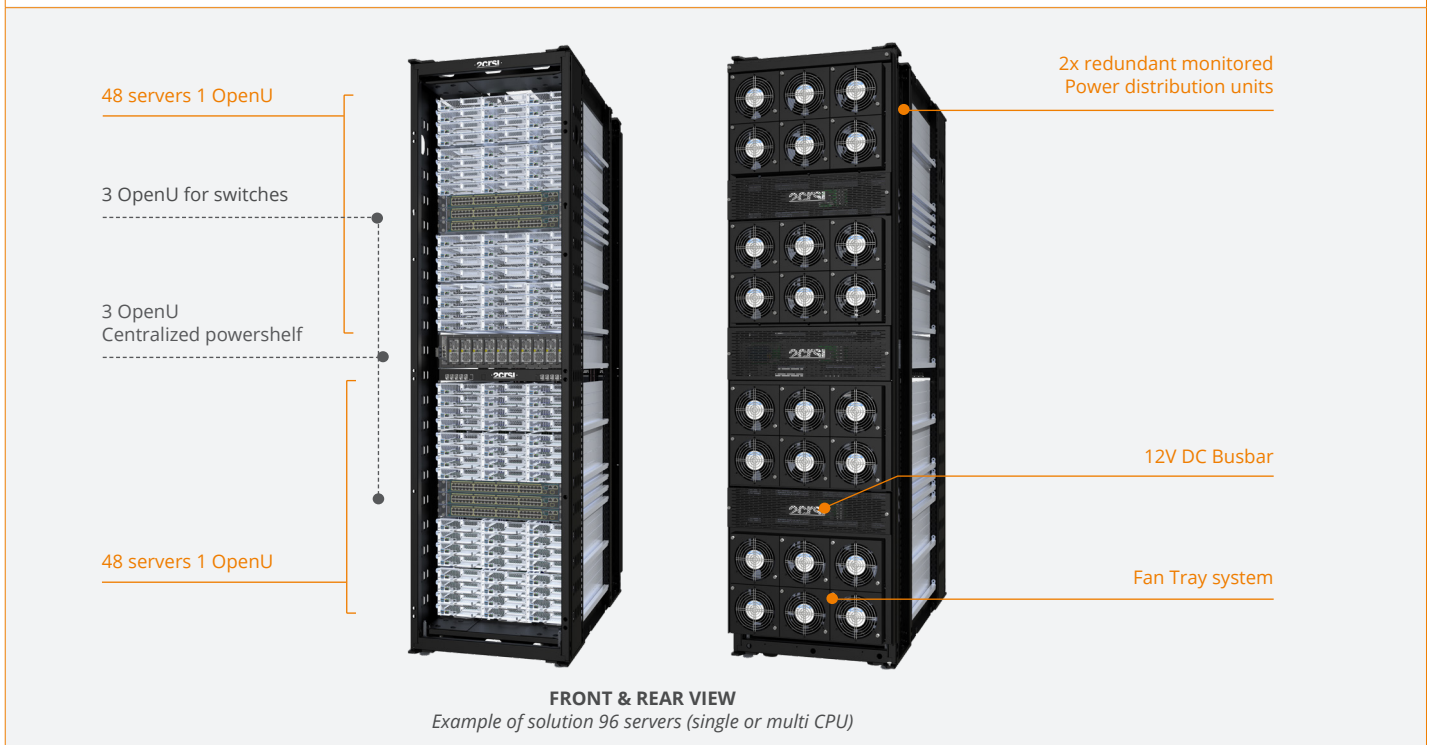

Specifications

Model	OctoRack 42SL	
Form Factor	Open Rack	
Number of OpenU	Up to 42 Open U	
Dimension	2220 x 600 x 1067 mm / 87,4" x 23.6" x 42" (H x W x D)	
Weight	243kg / 535,7lbs	
Dynamic Load	1400kg / 3086.5lbs with fans	
Power Shelf	Lite-On 3U: 27kW +3kW redundancy* each (1 unit)	Lite-On 1U: 9kW +3kW redundancy* each (3 units)
Power	Up to 30kW with one powershelf N+1 redundancy	Up to 36kW with three powershelves No redundancy
Busbars	Three per shelf (one or two available)	
Electrical input	32A 3-Phase	
Electrical output	12V DC	
Cooling	Optimized Air Cooling 24 fans	
Noise disturbance	75-90db	

*For other requirement please contact 2CRSi