

MiniRack Air

12 OpenU half rack form factor

Key features

- OpenU rack
- 9 fans monitored
- Compact
- Mobility

Overview

FRONT VIEW





Up to 2 rack stacked for up to 30 servers with OCtoPus 3

12 OpenU

Up to 12 KW


REAR VIEW




9 fans monitored and manageable via web interface

3 busbars 12V-300A

COMPATIBLE WITH 2CRSI OCtoPus series



OCtoPus 1.4

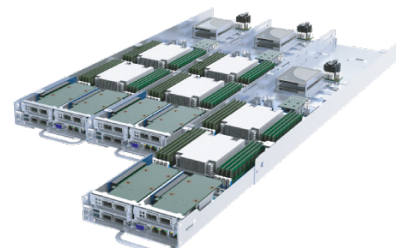

OCtoPus 3

Specifications

Model	MiniRack
Form factor	OCP OU 21" servers / 19" form factor through an adaptor kit
Number of OpenU	12 OU / [12 U]
Dimension	600 x 780 x 1200 mm [600 x 780 x 1120 without fan] (W x H x D) / 23.62" x 30.71" x 47.24" [23.62" x 30.71" x 44.09" without fan] (W x H x D)
Weight	90 kg / 198.41lbs with fans
Dynamic load	25kg per OU
Power Shelf	Up to 12 KW
Electrical Input	Single-phase, Line/Neutral/Ground
Electrical Output	12VDC
Cooling	Optimized Air cooling 9 fans monitored and manageable via web interface
Options	Additional doors / full Rack 19" kit 12U / customisable batch 10 units